
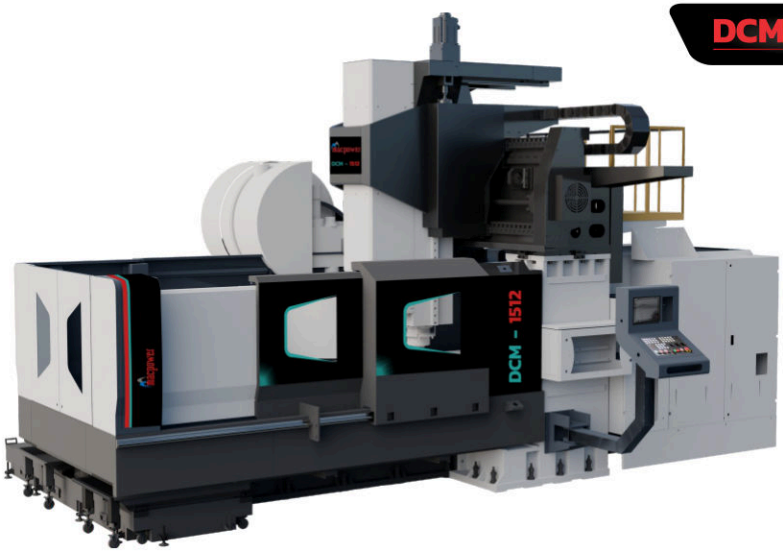



DCM - 1512

TABLE SIZE (CLAMPING AREA)	MM	1600x 1000
AXIS STROKE (X / Y / Z)	MM	1500 / 1200 / 750
RAPID FEED (X/Y/Z) AXIS	M/MIN	20/20/20
LOAD CAPACITY	KG	2200
SPINDLE	-	BT - 40 / BT - 50
RATED POWER (FANUC)	KW	11
WEIGHT (APPROX)	KG	15000
DIMENSIONS (APPROX) (WXDXH)	MM	-

DCM - 2112

TABLE SIZE (CLAMPING AREA)	MM	2200 x 1200
AXIS STROKE (X / Y / Z)	MM	2100 / 1200 / 750
RAPID FEED (X/Y/Z)	M/MIN	20/20/20
LOAD CAPACITY	KG	4000
SPINDLE	-	BT - 40 / BT - 50
RATED POWER (FANUC)	KW	11
WEIGHT (APPROX)	KG	20000
DIMENSIONS (APPROX) (WXDXH)	MM	-

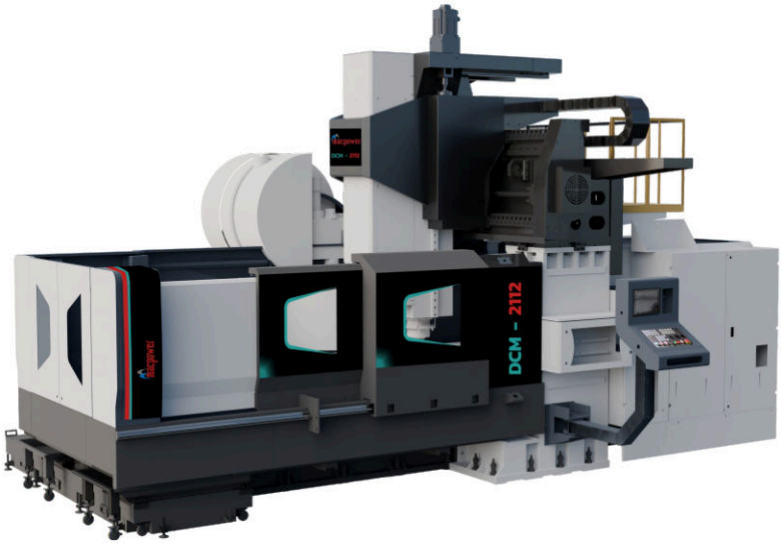

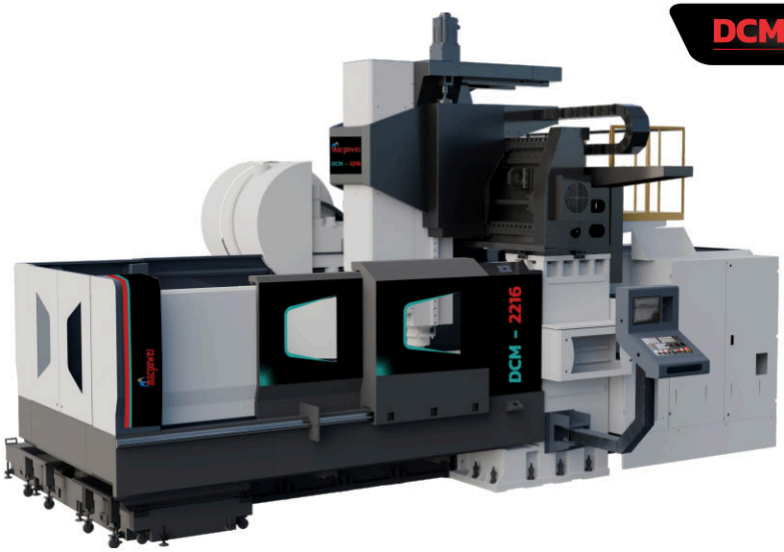



DCM - 2216

TABLE SIZE (CLAMPING AREA)	MM	2200 x 1300
AXIS STROKE (X / Y / Z)	MM	2200 / 1600 / 800 (1000)
RAPID FEED (X/Y/Z)	M/MIN	15/20/15
LOAD CAPACITY	KG	6000
SPINDLE	-	BT - 50
RATED POWER (FANUC)	KW	18.5 / 22 / 30
WEIGHT (APPROX)	KG	23000
DIMENSIONS (APPROX) (WxLxH)	MM	-

DCM - 2618

TABLE SIZE (CLAMPING AREA)	MM	2600 x 1600
AXIS STROKE (X / Y / Z)	MM	2650 / 1850 / 800 (1000)
RAPID FEED (X/Y/Z)	M/MIN	20/20/15
LOAD CAPACITY	KG	7000
SPINDLE	-	BT - 50
RATED POWER (FANUC)	KW	18.5 / 22
WEIGHT (APPROX)	KG	22500
DIMENSIONS (APPROX) (WxLxH)	MM	-

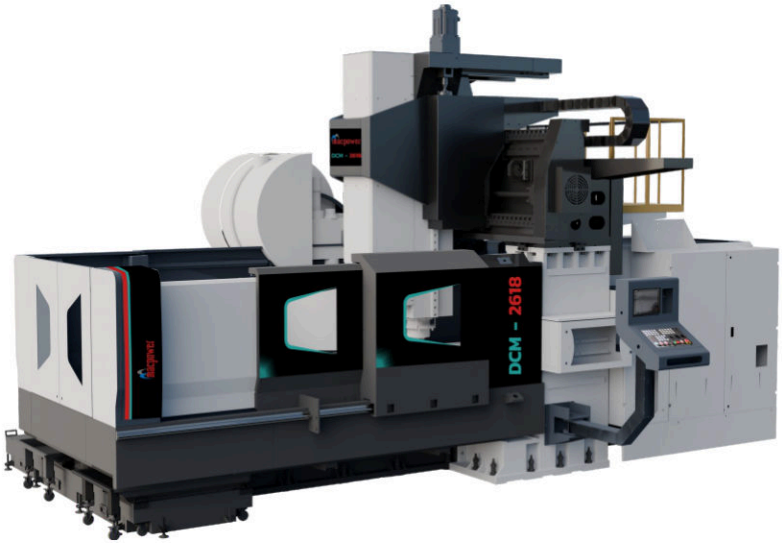

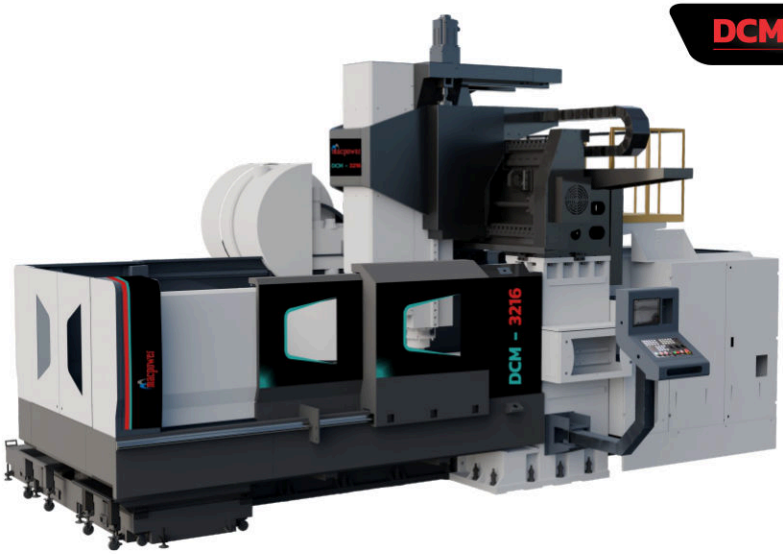



DCM - 3216

TABLE SIZE (CLAMPING AREA)	MM	3000 x 1300
AXIS STROKE (X / Y / Z)	MM	3200 / 1600 / 800 (1000)
RAPID FEED (X/Y/Z)	M/MIN	15/15/15
LOAD CAPACITY	KG	8000
SPINDLE	-	BT - 50
RATED POWER (FANUC)	KW	18.5 / 22 / 30
WEIGHT (APPROX)	KG	24500
DIMENSIONS (APPROX) (WxLxH)	MM	-

DCM - 3222

TABLE SIZE (CLAMPING AREA)	MM	3000 x 2000
AXIS STROKE (X / Y / Z)	MM	3200 / 2760 / 800 (1000)
RAPID FEED (X/Y/Z)	M/MIN	15/15/15
LOAD CAPACITY	KG	9000
SPINDLE	-	BT - 50
RATED POWER (FANUC)	KW	18.5 / 22 / 30
WEIGHT (APPROX)	KG	33000
DIMENSIONS (APPROX) (WxLxH)	MM	-

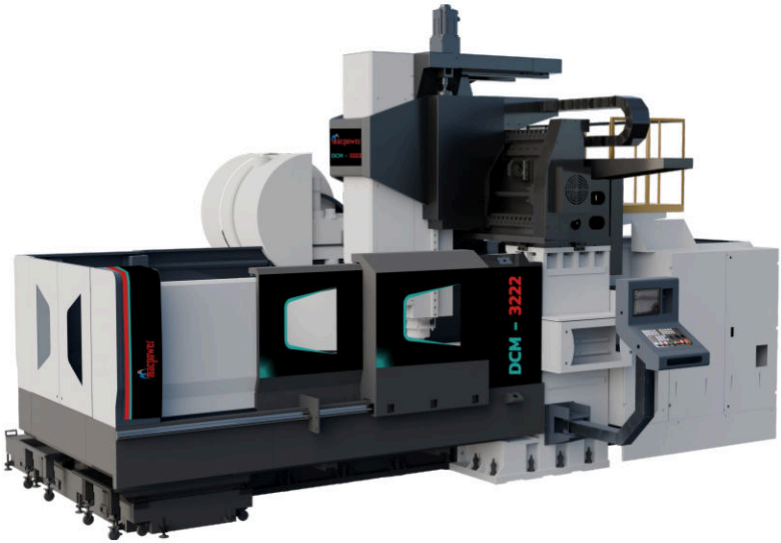

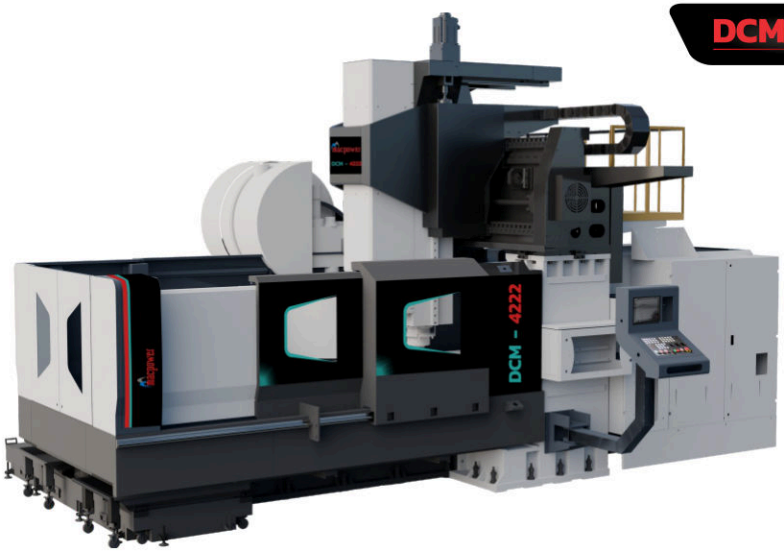

DCM - 4222

TABLE SIZE (CLAMPING AREA)	MM	3500 x 2000
AXIS STROKE (X / Y / Z)	MM	4200 / 2760 / 800 (1000)
RAPID FEED (X/Y/Z)	M/MIN	15/15/15
LOAD CAPACITY	KG	10000
SPINDLE	-	BT - 50
RATED POWER (FANUC)	KW	18.5 / 22 / 30
WEIGHT (APPROX)	KG	35900
DIMENSIONS (APPROX) (WxLxH)	MM	-

DCM - 5227

TABLE SIZE (CLAMPING AREA)	MM	4500 x 2000
AXIS STROKE (X / Y / Z)	MM	5200 / 2760 / 800 (1000)
RAPID FEED (X/Y/Z)	M/MIN	15/15/15
LOAD CAPACITY	KG	12000
SPINDLE	-	BT - 50
RATED POWER (FANUC)	KW	18.5 / 22 / 30
WEIGHT (APPROX)	KG	38000
DIMENSIONS (APPROX) (WxLxH)	MM	-

