


DCM - 1512

TABLE SIZE (CLAMPING AREA)	MM	1600x 1000
AXIS STROKE (X / Y / Z)	MM	1500 / 1200 / 750
RAPID FEED (X/Y/Z) AXIS	M/MIN	20/20/20
LOAD CAPACITY	KG	2200
SPINDLE	-	BT - 40 / BT - 50
RATED POWER (FANUC)	KW	11
WEIGHT (APPROX)	KG	15000
DIMENSIONS (APPROX) (WXDXH)	MM	-

DCM - 2112

TABLE SIZE (CLAMPING AREA)	MM	2200 x 1200
AXIS STROKE (X / Y / Z)	MM	2100 / 1200 / 750
RAPID FEED (X/Y/Z)	M/MIN	20/20/20
LOAD CAPACITY	KG	4000
SPINDLE	-	BT - 40 / BT - 50
RATED POWER (FANUC)	KW	11
WEIGHT (APPROX)	KG	20000
DIMENSIONS (APPROX) (WXDXH)	MM	-

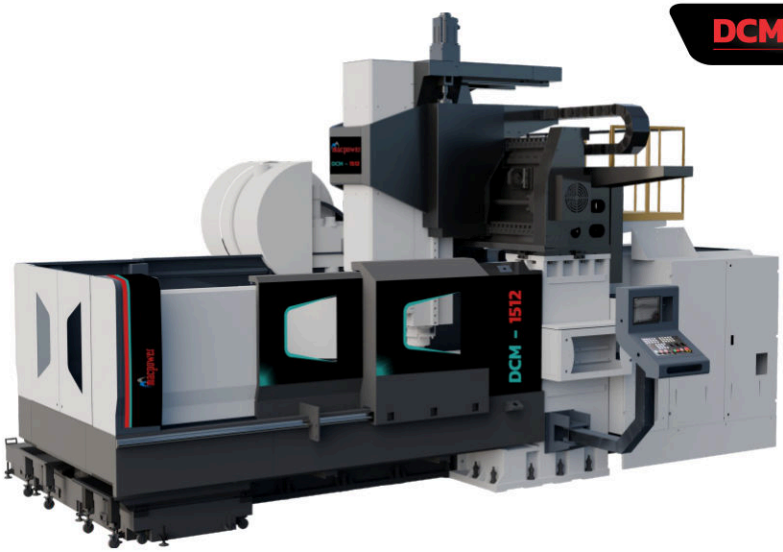