
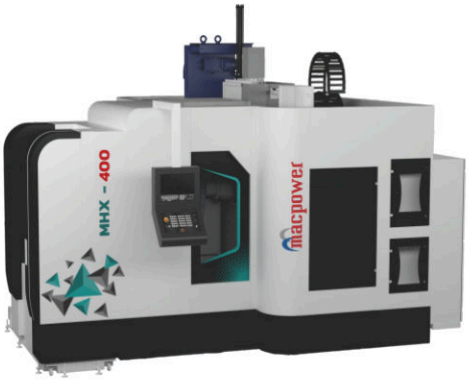



MHX - 400

TABLE SIZE (CLAMPING AREA)	MM	400x400
AXIS STROKE (X / Y / Z)	MM	600 / 600 / 600
RAPID FEED RATES X/Y/Z AXIS	M/MIN	36 (40)
LOAD CAPACITY	KG	350
SPINDLE	-	BT - 40 / BT - 50
RATED POWER (FANUC)	KW	11 / 15
WEIGHT (APPROX)	KG	-
DIMENSIONS (APPROX) (WXDXH)	MM	-

MHX - 500

TABLE SIZE (CLAMPING AREA)	MM	500x500
AXIS STROKE (X / Y / Z)	MM	800 / 700 / 700
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30 (40)
LOAD CAPACITY	KG	500
SPINDLE	-	BT - 50
RATED POWER (FANUC)	KW	15 / 18.5
WEIGHT (APPROX)	KG	-
DIMENSIONS (APPROX) (WXDXH)	MM	-

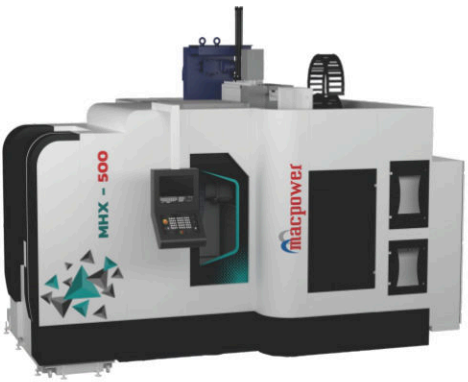

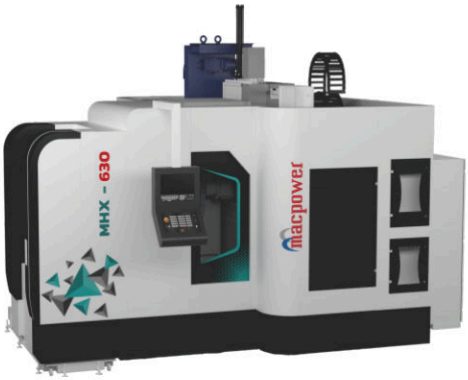

MHX - 630

TABLE SIZE (CLAMPING AREA)	MM	630x630
AXIS STROKE (X / Y / Z)	MM	1000 / 800 / 850
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30 (40)
LOAD CAPACITY	KG	1000
SPINDLE	-	BT - 50
RATED POWER (FANUC)	KW	15 / 18.5
WEIGHT (APPROX)	KG	-
DIMENSIONS (APPROX) (WXDXH)	MM	-