

MONO - 1000

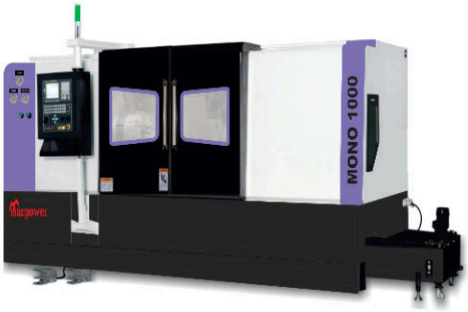


SWING OVER CARRIAGE	MM	250
MAX. TURNING DIA.	MM	350
MAX. TURNING LENGTH	MM	1025
TRAVEL (X / Z)	MM	185 / 1025
RAPID FEED (X / Z)	M/MIN	24
CHUCK SIZE	MM	200 X 3
SPINDLE POWER (FANUC)	kW	11 / 15
SPINDLE BORE	MM	63
SPINDLE NOSE		A2 - 6
WEIGHT (APPROX)	KG	5100

MONO - 1000 SUPER

SWING OVER CARRIAGE	MM	250
MAX. TURNING DIA.	MM	350
MAX. TURNING LENGTH	MM	1025
TRAVEL (X / Z)	MM	185 / 1025
RAPID FEED (X / Z)	M/MIN	24
CHUCK SIZE	MM	250 X 3
SPINDLE POWER (FANUC)	kW	11 / 15
SPINDLE BORE	MM	90
SPINDLE NOSE		A2 - 8
WEIGHT (APPROX)	KG	5200

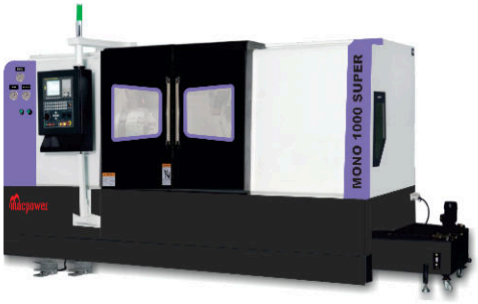

MONO - 1200

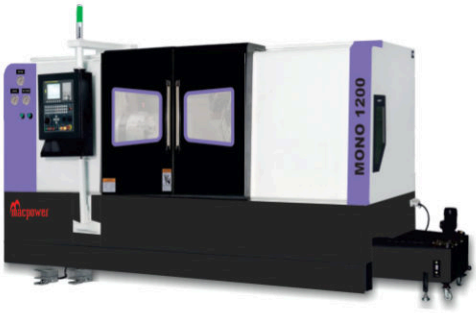

SWING OVER CARRIAGE.	MM	250
MAX. TURNING DIA.	MM	350
MAX. TURNING LENGTH	MM	1225
TRAVEL (X / Z)	MM	185 / 1225
RAPID FEED (X / Z)	M/MIN	24
CHUCK SIZE	MM	200 X 3
SPINDLE POWER (FANUC)	kW	11 / 15
SPINDLE BORE	MM	63
SPINDLE NOSE		A2 - 6
WEIGHT (APPROX)	KG	5400

MONO – 1200 SUPER



SWING OVER CARRIAGE	MM	250
MAX. TURNING DIA.	MM	350
MAX. TURNING LENGTH	MM	1225
TRAVEL (X / Z)	MM	185 / 1225
RAPID FEED (X / Z)	M/MIN	24
CHUCK SIZE	MM	250 X 3
SPINDLE POWER (FANUC)	kW	11 / 15
SPINDLE BORE	MM	90
SPINDLE NOSE		A2 – 8
WEIGHT (APPROX)	KG	5500

MONO – 1500

SWING OVER CARRIAGE	MM	250
MAX. TURNING DIA.	MM	350
MAX. TURNING LENGTH	MM	1500
TRAVEL (X / Z)	MM	185 / 1500
RAPID FEED (X / Z)	M/MIN	20
CHUCK SIZE	MM	200 X 3
SPINDLE POWER (FANUC)	kW	11 / 15
SPINDLE BORE	MM	63
SPINDLE NOSE		A2 – 6
WEIGHT (APPROX)	KG	–



MONO – 1500 SUPER



SWING OVER CARRIAGE.	MM	250
MAX. TURNING DIA.	MM	350
MAX. TURNING LENGTH	MM	1500
TRAVEL (X / Z)	MM	185 / 1500
RAPID FEED (X / Z)	M/MIN	20
CHUCK SIZE	MM	250 X 3
SPINDLE POWER (FANUC)	kW	11 / 15 (P)
SPINDLE BORE	MM	90
SPINDLE NOSE		A2 – 8
WEIGHT (APPROX)	KG	–



MONO - 2000

SWING OVER CARRIAGE	MM	250
MAX. TURNING DIA.	MM	350
MAX. TURNING LENGTH	MM	2000
TRAVEL (X / Z)	MM	185 / 2000
RAPID FEED (X / Z)	M/MIN	20
CHUCK SIZE	MM	200 X 3
SPINDLE POWER (FANUC)	kW	11 / 15
SPINDLE BORE	MM	63
SPINDLE NOSE		A2 - 6
WEIGHT (APPROX)	KG	-

MONO - 2000 SUPER

SWING OVER CARRIAGE	MM	250
MAX. TURNING DIA.	MM	350
MAX. TURNING LENGTH	MM	2000
TRAVEL (X / Z)	MM	185 / 2000
RAPID FEED (X / Z)	M/MIN	20
CHUCK SIZE	MM	250 X 3
SPINDLE POWER (FANUC)	kW	11 / 15 (P)
SPINDLE BORE	MM	90
SPINDLE NOSE		A2 - 8
WEIGHT (APPROX)	KG	-

