

VIBRANT - 400

TABLE SIZE (CLAMPING AREA)	MM	300x600
AXIS STROKE (X / Y / Z)	MM	410 / 300 / 300
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/30
LOAD CAPACITY	KG	250
SPINDLE	-	BT - 40
RATED POWER (FANUC)	KW	5.5 / 7.5
WEIGHT (APPROX)	KG	3150
DIMENSIONS (APPROX) (WXDXH)	MM	1911x2618x2500

VIBRANT - 500

TABLE SIZE (CLAMPING AREA)	MM	450x650
AXIS STROKE (X / Y / Z)	MM	525 / 500 / 500
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/30
LOAD CAPACITY	KG	500
SPINDLE	-	BT - 40
RATED POWER (FANUC)	KW	5.5 / 7.5
WEIGHT (APPROX)	KG	4060
DIMENSIONS (APPROX) (WXDXH)	MM	2332x2845x2890





VIBRANT - 600

TABLE SIZE (CLAMPING AREA)	MM	500x800
AXIS STROKE (X / Y / Z)	MM	600 / 500 / 500
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/30
LOAD CAPACITY	KG	500
SPINDLE	-	BT - 40
RATED POWER (FANUC)	KW	5.5 / 7.5
WEIGHT (APPROX)	KG	4360
DIMENSIONS (APPROX) (WXDXH)	MM	2332x2845x2890




VIBRANT - 700

TABLE SIZE (CLAMPING AREA)	MM	500x900
AXIS STROKE (X / Y / Z)	MM	700 / 500 / 500
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/30
LOAD CAPACITY	KG	550
SPINDLE	-	BT - 40
RATED POWER (FANUC)	KW	5.5 / 7.5
WEIGHT (APPROX)	KG	4400
DIMENSIONS (APPROX) (WXDXH)	MM	2407x2845x2890

VIBRANT - 800

TABLE SIZE (CLAMPING AREA)	MM	500x1000
AXIS STROKE (X / Y / Z)	MM	800 / 550 / 550
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/30
LOAD CAPACITY	KG	600
SPINDLE	-	BT - 40
RATED POWER (FANUC)	KW	7.5 / 11
WEIGHT (APPROX)	KG	4800
DIMENSIONS (APPROX) (WXDXH)	MM	2602x2842x2878



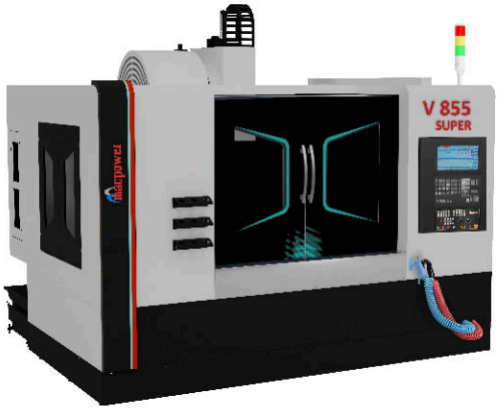

V - 855 SUPER

TABLE SIZE (CLAMPING AREA)	MM	500x1050
AXIS STROKE (X / Y / Z)	MM	850 / 510 / 510
RAPID FEED RATES X/Y/Z AXIS	M/MIN	36/36/36
LOAD CAPACITY	KG	800
SPINDLE	-	BT - 40
RATED POWER (FANUC)	KW	7.5 / 11
WEIGHT (APPROX)	KG	5500
DIMENSIONS (APPROX) (WXDXH)	MM	2570x3168x3057



VIBRANT - 900

TABLE SIZE (CLAMPING AREA)	MM	500x1100
AXIS STROKE (X / Y / Z)	MM	900 / 550 / 550
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/30
LOAD CAPACITY	KG	900
SPINDLE	-	BT - 40
RATED POWER (FANUC)	KW	7.5 / 11
WEIGHT (APPROX)	KG	5040
DIMENSIONS (APPROX) (WXDXH)	MM	2677x2842x2878

VIBRANT - 1055

TABLE SIZE (CLAMPING AREA)	MM	500x1200
AXIS STROKE (X / Y / Z)	MM	1050 / 510 / 510
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/30
LOAD CAPACITY	KG	1000
SPINDLE	-	BT - 40 / BT - 50
RATED POWER (FANUC)	KW	11 / 15
WEIGHT (APPROX)	KG	6200
DIMENSIONS (APPROX) (WXDXH)	MM	2745x3168x3057





VIBRANT - 1066

TABLE SIZE (CLAMPING AREA)	MM	600x1120
AXIS STROKE (X / Y / Z)	MM	1020 / 610 / 610
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/24
LOAD CAPACITY	KG	1200
SPINDLE	-	BT - 40 / BT - 50
RATED POWER (FANUC)	KW	11 / 15
WEIGHT (APPROX)	KG	-
DIMENSIONS (APPROX) (WXDXH)	MM	2883x3325x3310 (BT-40) 2883x3325x3395 (BT-50)

VIBRANT - 1166

TABLE SIZE (CLAMPING AREA)	MM	600x1300
AXIS STROKE (X / Y / Z)	MM	1100 / 650 / 650
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/30
LOAD CAPACITY	KG	1100
SPINDLE	-	BT - 40 / BT - 50
RATED POWER (FANUC)	KW	11 / 15
WEIGHT (APPROX)	KG	7170 / 7860
DIMENSIONS (APPROX) (WXDXH)	MM	2990x3480x3290 (BT-40) 2990x3480x3375 (BT-50)





VIBRANT - 1366

TABLE SIZE (CLAMPING AREA)	MM	650x1450
AXIS STROKE (X / Y / Z)	MM	1310 / 650 / 650
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/30
LOAD CAPACITY	KG	1300
SPINDLE	-	BT - 40 / BT - 50
RATED POWER (FANUC)	KW	11 / 15
WEIGHT (APPROX)	KG	7405 / 8095
DIMENSIONS (APPROX) (WXDXH)	MM	3590x3480x3220 (BT-40) 3590x3480x3405 (BT-50)