


VIBRANT - 700

TABLE SIZE (CLAMPING AREA)	MM	500x900
AXIS STROKE (X / Y / Z)	MM	700 / 500 / 500
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/30
LOAD CAPACITY	KG	550
SPINDLE	-	BT - 40
RATED POWER (FANUC)	KW	5.5 / 7.5
WEIGHT (APPROX)	KG	4400
DIMENSIONS (APPROX) (WXDXH)	MM	2407x2845x2890

VIBRANT - 800

TABLE SIZE (CLAMPING AREA)	MM	500x1000
AXIS STROKE (X / Y / Z)	MM	800 / 550 / 550
RAPID FEED RATES X/Y/Z AXIS	M/MIN	30/30/30
LOAD CAPACITY	KG	600
SPINDLE	-	BT - 40
RATED POWER (FANUC)	KW	7.5 / 11
WEIGHT (APPROX)	KG	4800
DIMENSIONS (APPROX) (WXDXH)	MM	2602x2842x2878



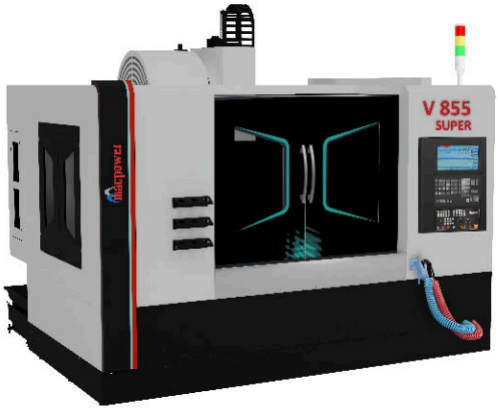

V - 855 SUPER

TABLE SIZE (CLAMPING AREA)	MM	500x1050
AXIS STROKE (X / Y / Z)	MM	850 / 510 / 510
RAPID FEED RATES X/Y/Z AXIS	M/MIN	36/36/36
LOAD CAPACITY	KG	800
SPINDLE	-	BT - 40
RATED POWER (FANUC)	KW	7.5 / 11
WEIGHT (APPROX)	KG	5500
DIMENSIONS (APPROX) (WXDXH)	MM	2570x3168x3057